


Type / Typ	Standard
Material	Polyamide 6.6 / Polyamid 6.6
Operating temp. / Einsatztemp.	-40°C - +85°C
Inflammability class / Entflammbarkeitsklasse	UL 94 V-2
Halogen free / Halogenfrei	Yes / Ja
Silicon free / Silikonfrei	Yes / Ja
UV-resistant / UV-beständig	No / Nein
UL certified / UL anerkannt*	E112916
<small>[Cable tie specifications according ANSI/UL 62275 Kabelbinderspezifikationen gemäß ANSI / UL 62275]</small>	
RoHS- compliant / RoHS- konform	Yes / Ja

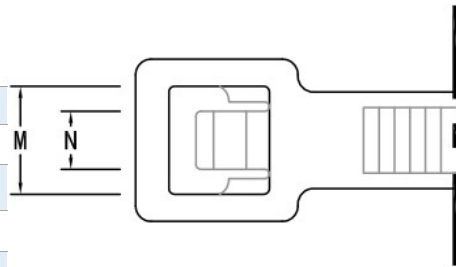

* Part no. may be followed by additional suffixes indicating packaging unit and/or color.
 Artikel Nr. können zusätzliche Suffixe für Verpackungseinheiten und/oder Farbe enthalten.

PART NO. ARTIKEL NR.	A mm	C mm	D mm	E mm	F mm	G mm	H mm	K mm	M mm	N mm	Max Ø mm	Tensile strength Zugfestigkeit min.[kg]
GT-120ST	1.3	4.8	8.4	7.9	5	89	121	0.8	5.2	2.8	24	22.2
GT-160ST	1.3	4.8	8.4	7.9	5	134	160	0.8	5.2	2.8	38	
GT-180ST	1.4	4.8	6.7	7.9	5.65	153	179	0.8	5.2	2.8	41	
GT-190ST	1.4	4.8	7.5	7.9	5	163	192	0.8	5.2	2.8	43	
GT-200ST	1.3	4.8	8.4	7.9	5	173	202	0.8	5.2	2.8	50	
GT-250ST	1.3	4.8	8.4	7.9	5.4	225	251	0.8	5.2	2.8	66	
GT-280ST	1.3	4.8	8.4	7.9	5.9	250	280	0.8	5.2	2.8	70	
GT-300ST	1.3	4.8	8.4	7.9	5.5	272	300	0.8	5.2	2.8	76	
GT-370ST	1.3	4.8	8.4	7.9	5.5	345	370	0.8	5.2	2.8	102	
GT-390ST	1.3	4.8	8.4	7.9	5.5	365	391	0.8	5.2	2.8	106	
GT-430ST	1.3	4.8	8.4	7.9	5.5	406	427	0.8	5.2	2.8	114	
GT-530ST	1.3	4.8	8.4	7.9	5.9	500	530	0.8	5.2	2.8	140	

Tolerances / Tolerances: Maße ohne Toleranzangaben nach / Dimension without tolerances details to DIN 16901

GW® GENERAL WIRING

